



REV	DESCRIPTION	APPD	DATE
-----	-------------	------	------

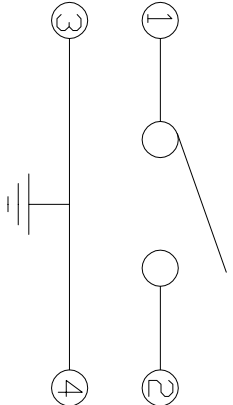

CIRCUIT DIAGRAM

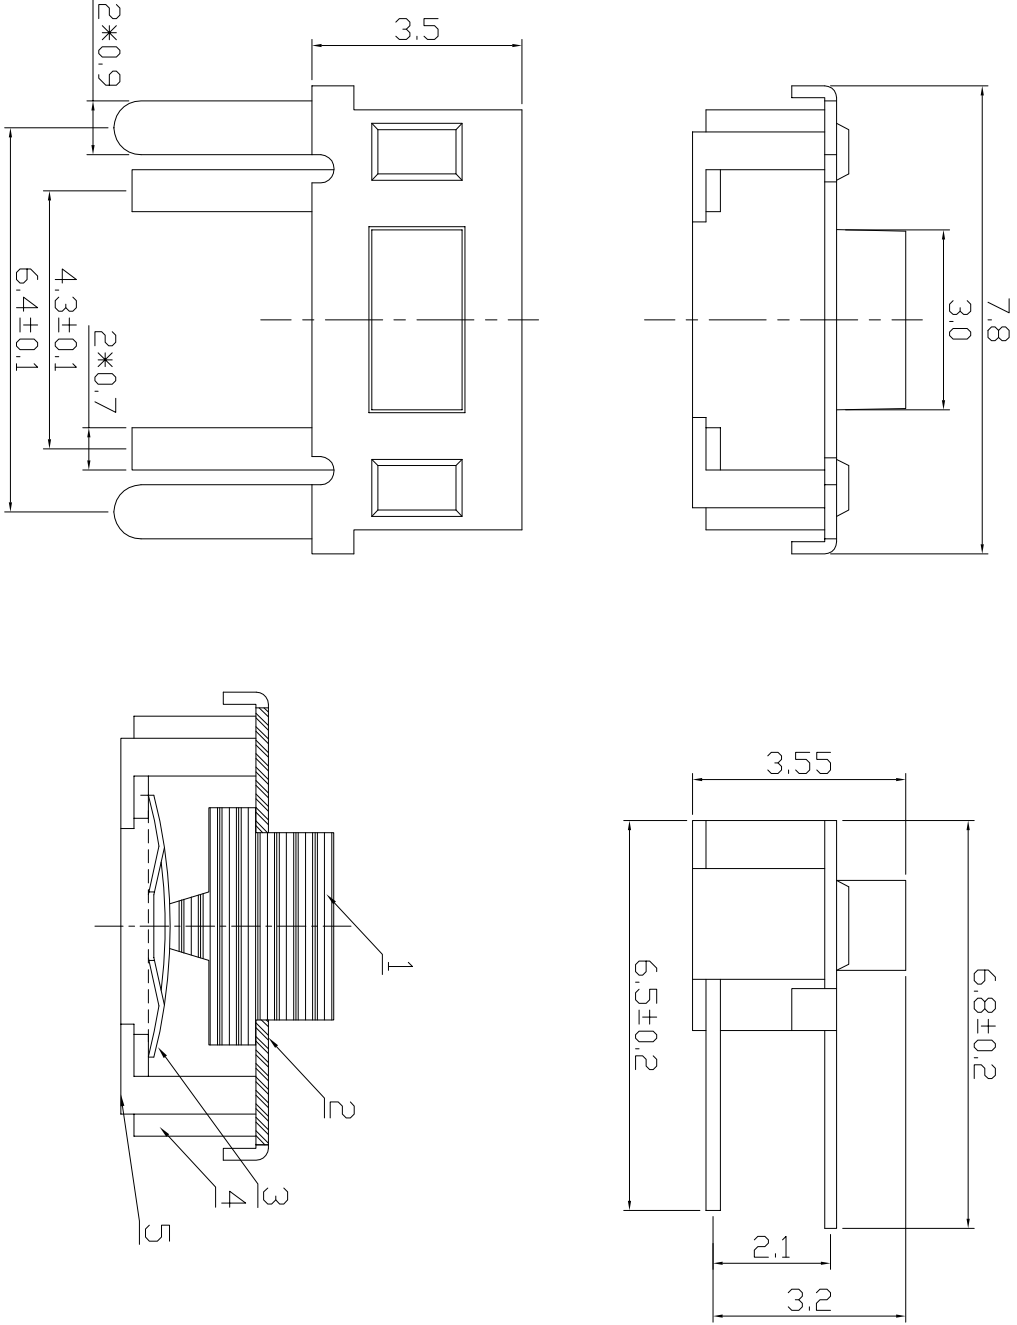

P.C.B. LAYOUT

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	LCP	BLACK
2	COVER	1	C2680	PLATING Ag
3	CONTACT	1	SUS	PLATING Ag
4	BOTTOM	1	LCP	BLACK
5	TERMINAL	2	C2680	PLATING Ag
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	
PART NO:		SCALE: 1/1	VER: 1	
GENERAL TOLERANCE:		DWG NO:	TITLE: TACT SWITCH	
X,±0.25, X=±0.2		DESIGNER BY: YONGX	MODEL NO: TS37A-DVB-M	
XX=±0.1, XXX=±0.05		APPROVED BY: JACK	GONGKIN ELECTRONIC CO.,LTD	
X°=±2°, XX°=±1°		DATE:		

- 1.额定功率/Raating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩMax;
- 3.绝缘/Insulation Resistance:100MΩMax;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
- 5.寿命/Life:30,000 cycler Min;
- 6.动作力/Operating Force:250±50gf;
- 7.行程/Travel:0.2±0.1mm;
- 8.使用温度/Operating Temperature:-20℃~70℃.