


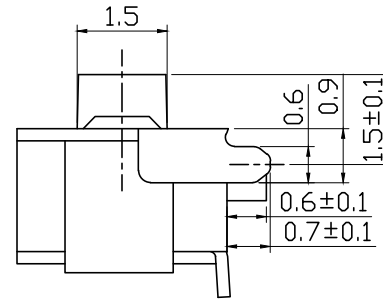
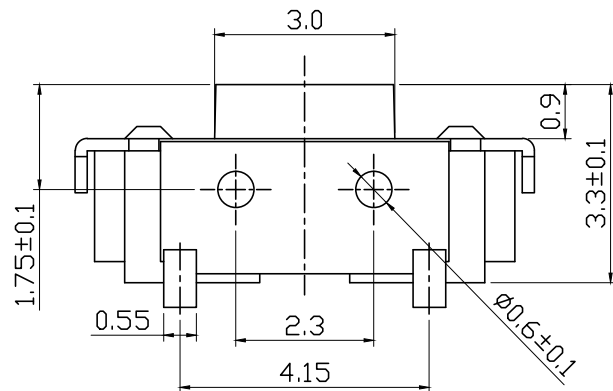
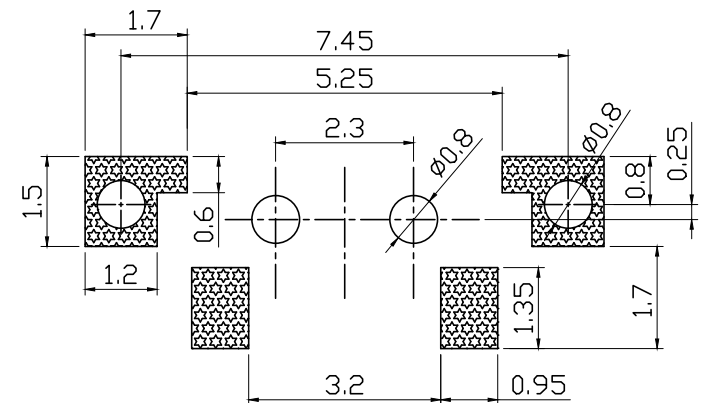


REV	DESCRIPTION	APPD	DATE

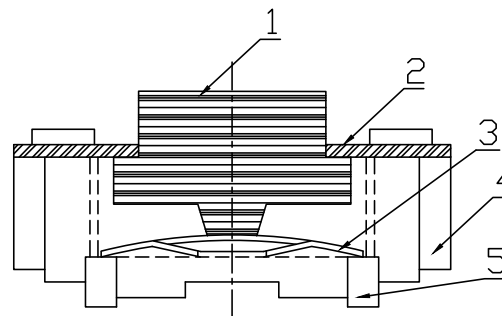

CIRCUIT DIAGRAM

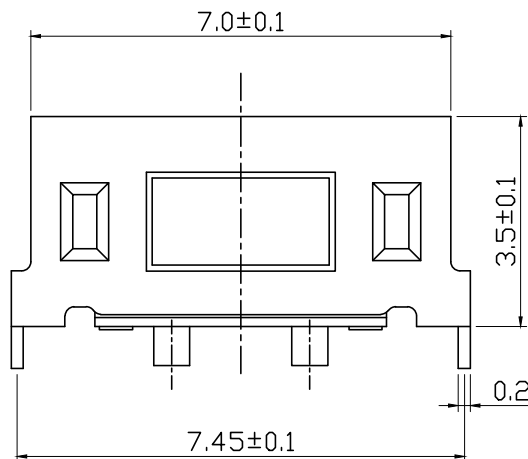

RECOMMENDED P.C.B. LAYOUT

- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩ Max;
- 3.绝缘/Insulation Resistance:100MΩ Max;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
- 5.寿命/Life:30,000 cycles Min;
- 6.动作力/Operating Force:250±50gf;
- 7.行程/Travel:0.25±0.1mm;
- 8.使用温度/Operating Temperature:-20℃~70℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	LCP	BLACK
2	COVER	1	C2680	PLATING Ag
3	CONTACT	1	SUS	PLATING Ag
4	BOTTOM	1	LCP	WHITE
5	TERMINAL	2	C2680	PLATING Ag
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
		SCALE: 1/	VER: 1	MODEL NO: TS37A2-SVXE-M
PART NO:		DWG NO:		 岡琦電子有限公司 GONGKIN ELECTRONIC CO.,LTD
GENERAL TOLERANCE:		DESIGNER BY:	YONGX	
X.=±0.25, .X=±0.2 .XX=±0.1, .XXX=±0.05 .X*=±2° .XX*=±1°		APPROVED BY:	JACK	
		DATE:		