






| REV | DESCRIPTION | APPD | DATE |
|-----|-------------|------|------|
|     |             |      |      |

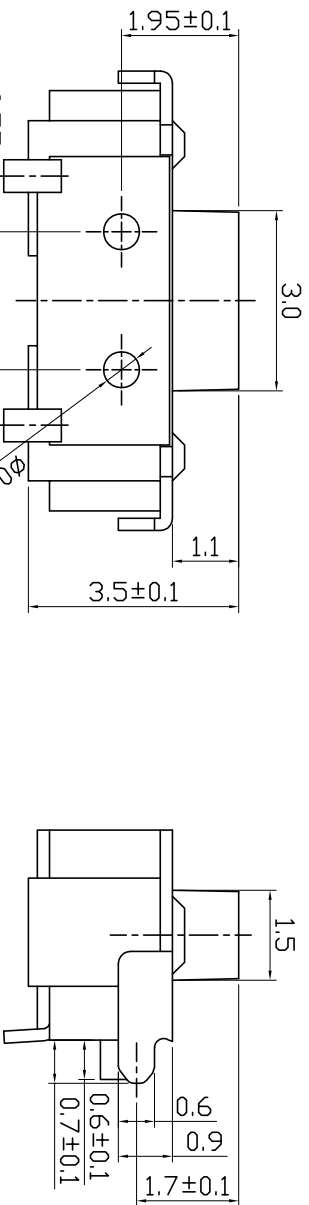


CIRCUIT DIAGRAM

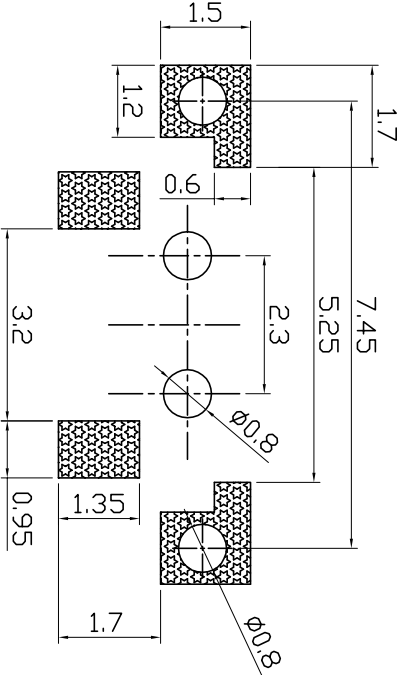

RECOMMENDED P.C.B. LAYOUT

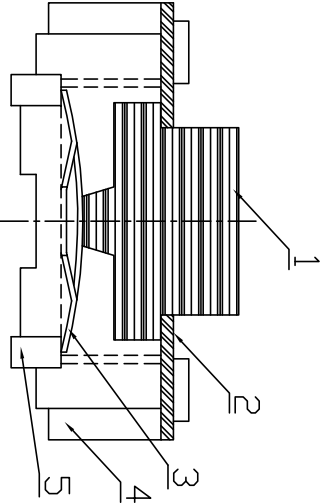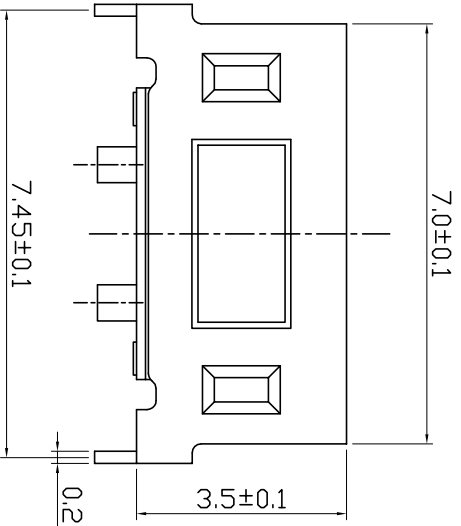

| NO.                                                                                            | DESCRIPTION | QTY                | MATERIAL                                                                                                                                  | FINISH     |
|------------------------------------------------------------------------------------------------|-------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------|
| 1                                                                                              | STEM        | 1                  | LCP                                                                                                                                       | BLACK      |
| 2                                                                                              | COVER       | 1                  | C2680                                                                                                                                     | PLATING Ag |
| 3                                                                                              | CONTACT     | 1                  | SUS                                                                                                                                       | PLATING Ag |
| 4                                                                                              | BOTTOM      | 1                  | LCP                                                                                                                                       | WHITE      |
| 5                                                                                              | TERMINAL    | 2                  | C2680                                                                                                                                     | PLATING Ag |
| UNIT/MM<br> | SIZE: A4    | SHEET: 1 OF 1      | TITLE: TACT SWITCH                                                                                                                        |            |
|                                                                                                | SCALE: 1/1  | VER: 1             | MODEL NO: TS37A-SVXE-M                                                                                                                    |            |
| PART NO:                                                                                       | DWG NO:     |                    | <div><br/>岡崎電子有限公司<br/>GONGKIN ELECTRONIC CO.,LTD</div> |            |
| GENERAL TOLERANCE:                                                                             |             |                    |                                                                                                                                           |            |
| X=±0.25, X=±0.2                                                                                |             |                    |                                                                                                                                           |            |
| XX=±0.1, XXX=±0.05                                                                             |             |                    |                                                                                                                                           |            |
| X°=±2°, XX°=±1°                                                                                |             | DESIGNER BY: YONGX |                                                                                                                                           |            |
|                                                                                                |             | APPROVED BY: JACK  |                                                                                                                                           |            |
| DATE:                                                                                          |             |                    |                                                                                                                                           |            |

- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩMax;
- 3.绝缘/Insulation Resistance:100MΩMax;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
- 5.寿命/Life:30,000 cycles Min;
- 6.动作力/Operating Force:250±50gf;
- 7.行程/Travel:0.25±0.1mm;
- 8.使用温度/Operating Temperature:-20℃~70℃.

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

8

H

G

F

E

D

C

B

A