

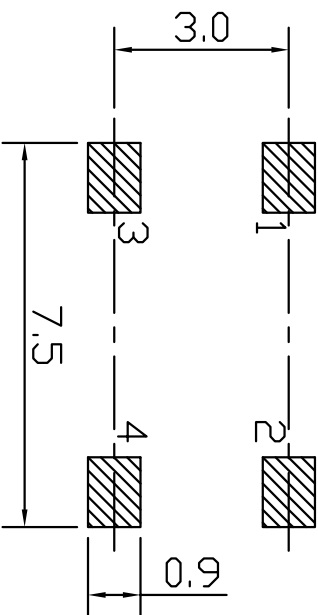


REV	DESCRIPTION	APPD	DATE


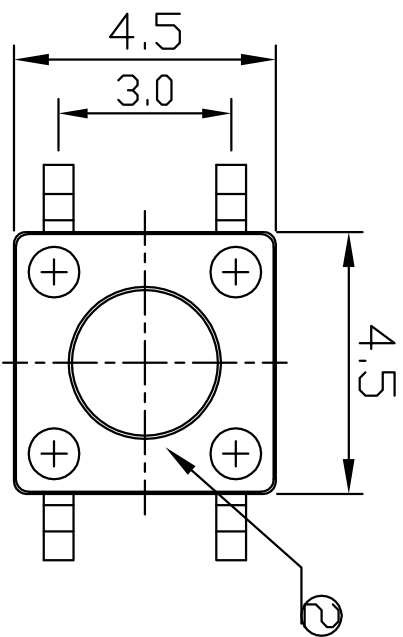


P.C.B LAYOUT

MAX.Ø2.3

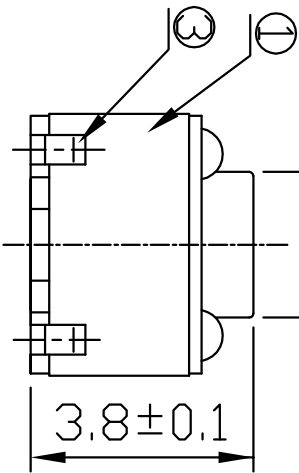


Circuit diagram

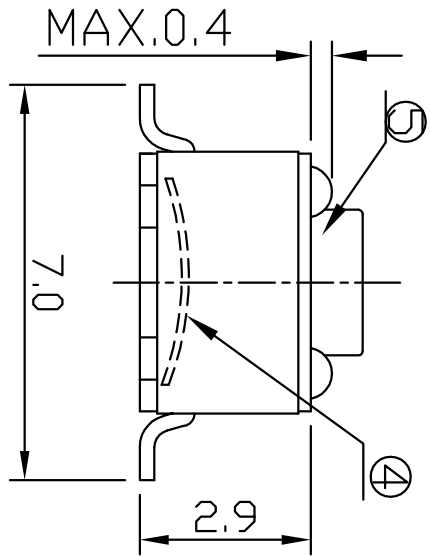

- 1.额定功率/Ra ting:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:50mΩMax;
- 3.绝缘/Insulation Resistance:100MΩMin;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute
- 5.寿命/Life:100,000 cycles Min;
- 6.动作力/Operating Force:250±50gf
- 7.行程/Travel:0.2±0.1mm

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	BASE	1	PA66	BLACK
2	COVER	1	SPCC	PLATING Sn
3	TERMINAL	4	C2680	PLATING Sn
4	CONTACT	1	SUS	PLATING Ag
5	STEM	1	PA66	BLACK
UNIT:MM				
	SIZE: A4	SHEET: 1 OF 1		
	SCALE: 1/1	VER: 1		
PART NO:	DWG NO:		MODEL NO:	
GENERAL TOLERANCE: 1		TITLE: TACT SWITCH		
DESIGNER BY: YONGX		 岡崎電子有限公司 GONGKIN ELECTRONIC CO.,LTD		
APPROVED BY: JACK				
DATE:				
X*=±0.5, .XX*=±0.25				
.XX*=±0.15, .XXX*=±0.05				
X*=±2°, .XX*=±1°				



岡崎電子有限公司

GONGKIN ELECTRONIC CO.,LTD