


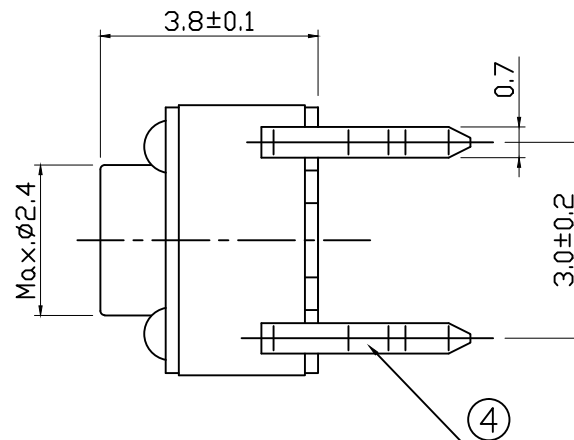
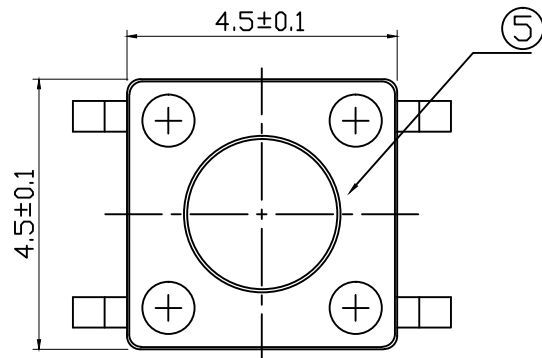


7	8
REV	DESCRIPTION
APPD	DATE

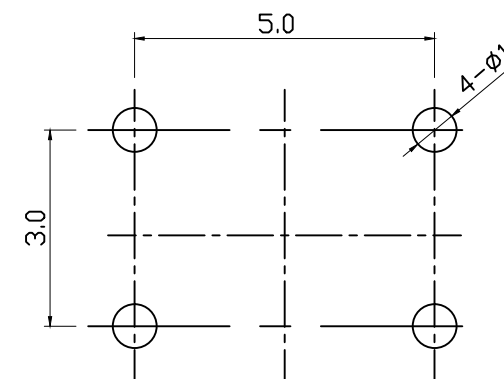

Circuit Diagram

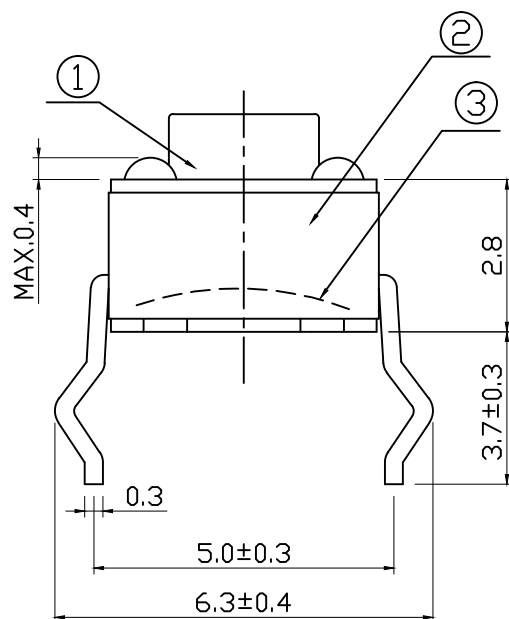

P.C.B Holes Diagram

- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩ Max;
- 3.绝缘/Insulation Resistance:100MΩ Min;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute
- 5.寿命/Life:80,000 cycler Min;
- 6.动作力/Operating Force:250±50gf
- 7.行程/Travel:0.2±0.1mm

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PPA	BLACK
2	BASE	1	PPA	BLACK
3	CONTACT	1	SUS	PLATING Ag
4	TERMINAL	4	BRASS	PLATING Ag
5	COVER	1	SPCC	PLATING Sn
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
		SCALE: 1/1	VER: 1	MODEL NO: TS44A-H38-M
PART NO:		DWG NO:		GONGKIN ELECTRONIC CO.,LTD
GENERAL TOLERANCE:		DESIGNER BY:	DONY	
X.=±0.3, .X=±0.15 .XX=±0.1, .XXX=±0.05 .X*=±2°, .XX*=±1°		APPROVED BY:	JACK	
		DATE:		



岡崎電子有限公司
GONGKIN ELECTRONIC CO.,LTD