

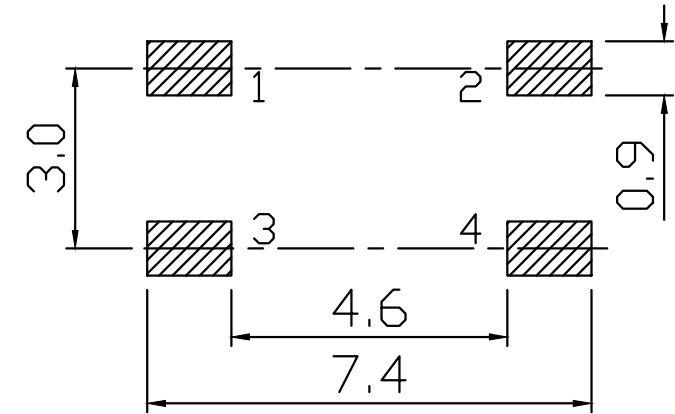




REV	DESCRIPTION	APPD	DATE

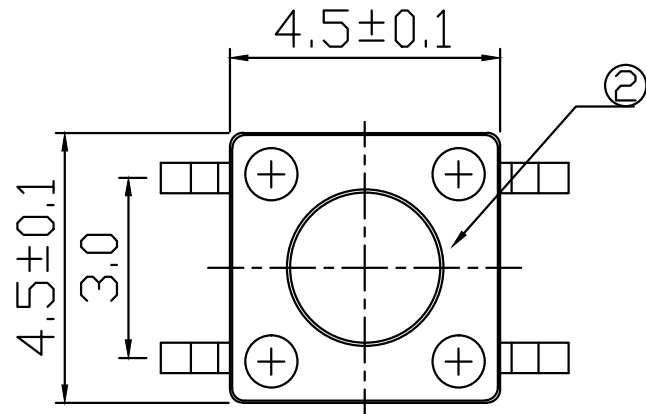

P.C.B Holes diagram

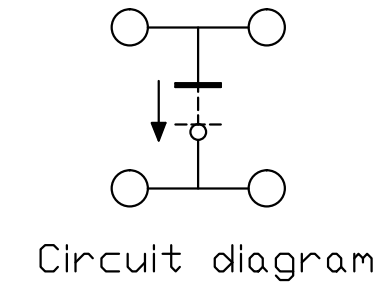

Circuit diagram

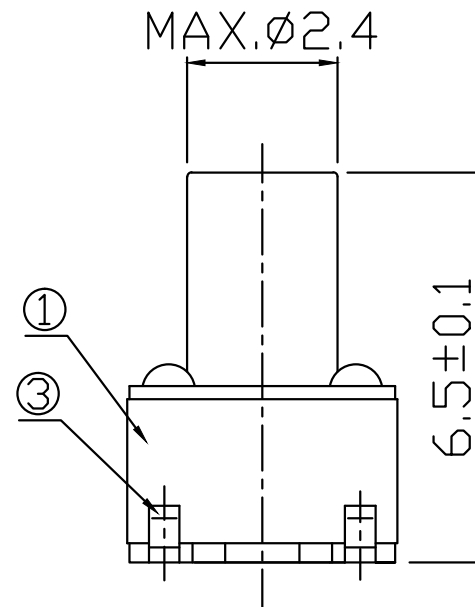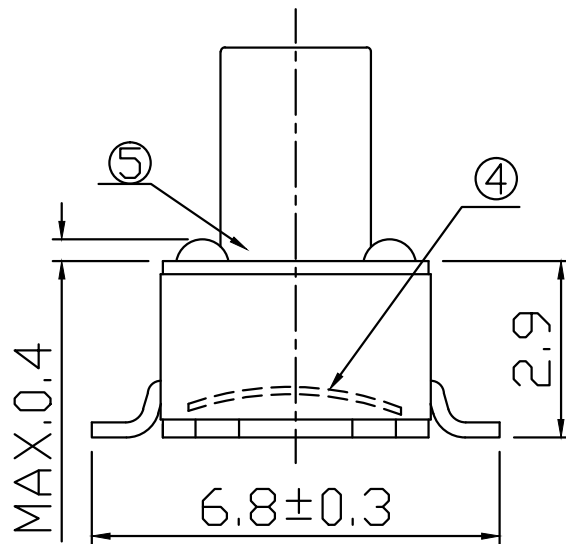

- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩMax;
- 3.绝缘/Insulation Resistance:100MΩMin;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute
- 5.寿命/Life:100,000 cycler Min;
- 6.动作力/Operating Force:250±50gf
- 7.行程/Travel:0.2±0.1mm;
- 8.使用温度/OPERATING TEMPERATURE:-20°C~70°C.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	BASE	1	PA66 or PPA	BLACK
2	COVER	1	SPCC	PLATING Sn
3	TERMINAL	4	C2680	PLATING Sn
4	CONTACT	1	SUS	PLATING Ag
5	STEM	1	PA66 or PPA	BLACK
UNIT:MM		SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
		SCALE: 1/1	VER: 1	MODEL NO: TS44A-S65-M
PART NO:		DWG NO:		
GENERAL TOLERANCE:		DESIGNER BY:	DONY	
X.=±0.3, .X=±0.15		APPROVED BY:	JACK	
.XX=±0.1, .XXX=±0.05		DATE:		
.X*=±2°, .XX*=±1°				
 岡崎電子有限公司 GONGKIN ELECTRONIC CO.,LTD				