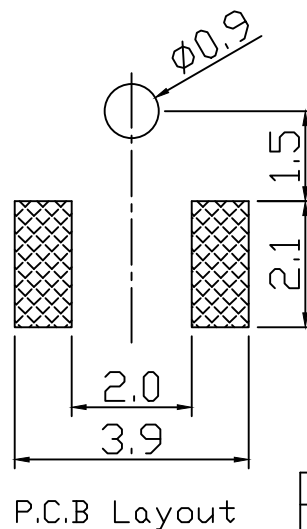
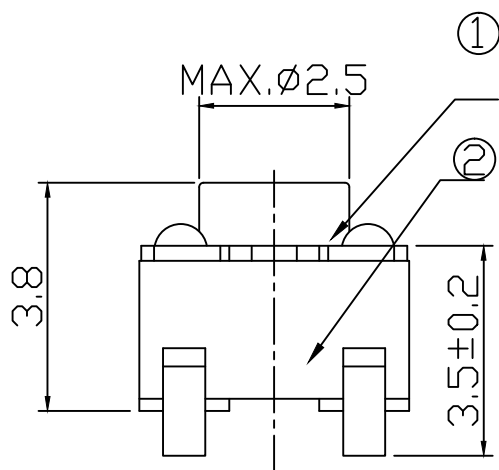
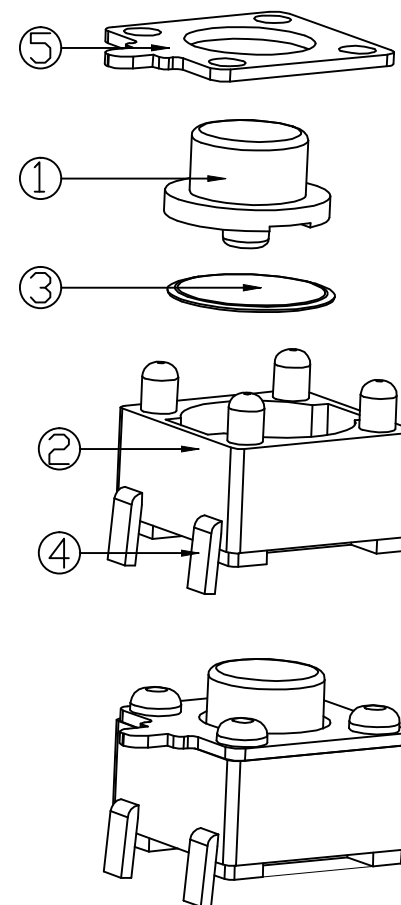
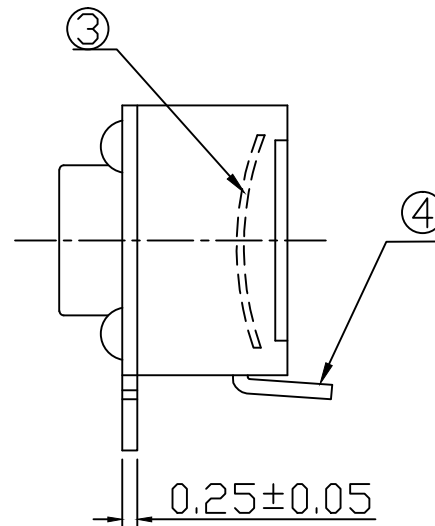
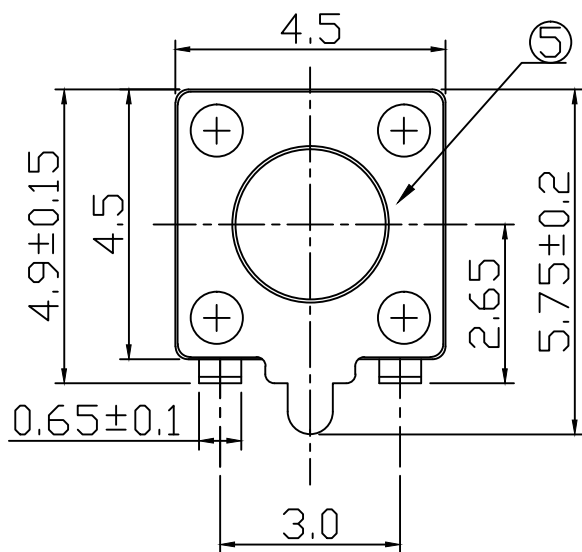


- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩMax;
- 3.绝缘/Insulation Resistance:100MΩMin;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute
- 5.寿命/Life:50,000 cycler Min;
- 6.动作力/Operating Force:250±50gf
- 7.行程/Travel:0.15±0.05mm
- 8.使用温度/Operating Temperature:-20°C~70°C.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PA66 or PPA	BLACK
2	BOTTOM	1	PA66 or PPA	BLACK
3	CONTACT	1	SUS	PLATING Ag
4	TERMINAL	2	C2680 T0.25	PLATING Ag
5	COVER	1	SPCC T0.25	PLATING Sn

UNIT:MM	SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
	SCALE: /	VER: 1	MODEL NO: TS44A-SVG38-M
PART NO:	DWG NO:	DESIGNER BY: DONY	 岡崎電子有限公司 GONGKIN ELECTRONIC CO.,LTD
GENERAL TOLERANCE: X.=±0.25, .X=±0.2 .XX=±0.1, .XXX=±0.05 .X*=±2° .XX*=±1°	APPROVED BY: JACK	DATE:	