

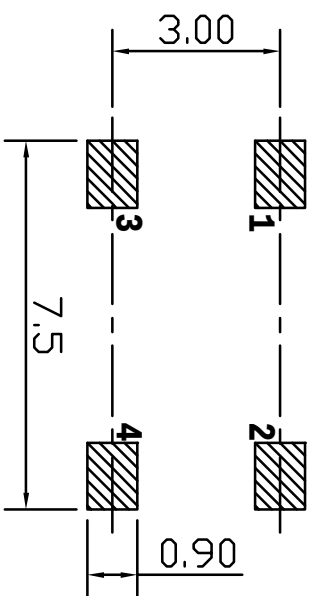



REV	DESCRIPTION	APPD	DATE

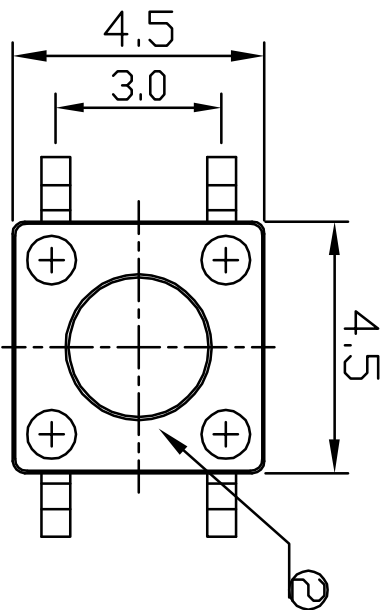

P.C.B Holes diagram

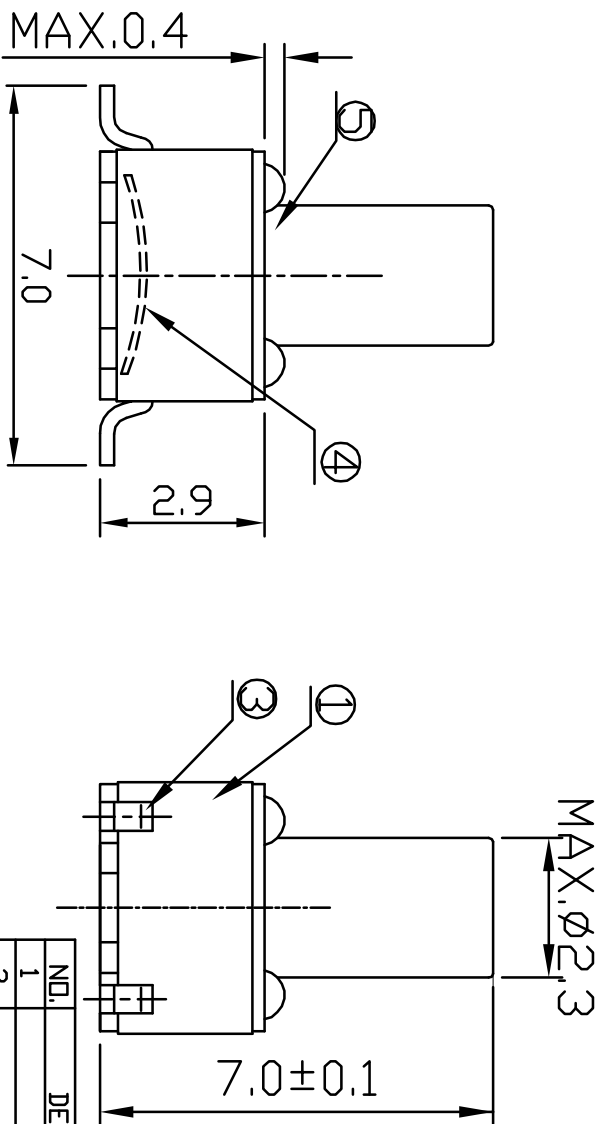

Circuit diagram



- 1. 额定功率/Rating:DC 12V 50mA;
- 2. 接触电阻/Contact Resistance:50mΩMax;
- 3. 绝缘/Insulation Resistance:100MΩMin;
- 4. 耐电压/Withstanding Voltage:AC250V For 1 Minute
- 5. 寿命/Life:100,000 cycles Min;
- 6. 动作力/Operating Force:250±50gf
- 7. 行程/Travel:0.2±0.1mm

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	BASE	1	PAG6	BLACK
2	COVER	1	SPCC	PLATING Sn
3	TERMINAL	4	C2680	PLATING Sn
4	CONTACT	1	SUS	PLATING Ag
5	STEM	1	PAG6	BLACK
UNIT:mm				
SCALE: 1 OF 1				
TITLE: TACT SWITCH				
MODEL NO: TS44A-S70-M				
PART NO:				
DWG NO:				
GENERAL TOLERANCE:				
X=±0.5, X=±0.35				
.XX=±0.15, .XXX=±0.05				
X°=±2°, .XX°=±1°				
DESIGNER BY: YONGX				
APPROVED BY: JACK				
DATE:				
GONGKIN ELECTRONIC CO.,LTD				

岡崎電子有限公司

GONGKIN ELECTRONIC CO.,LTD