

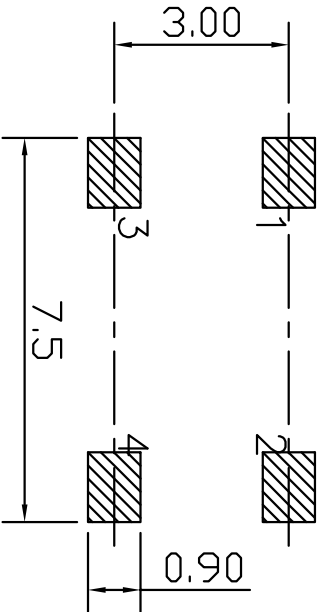
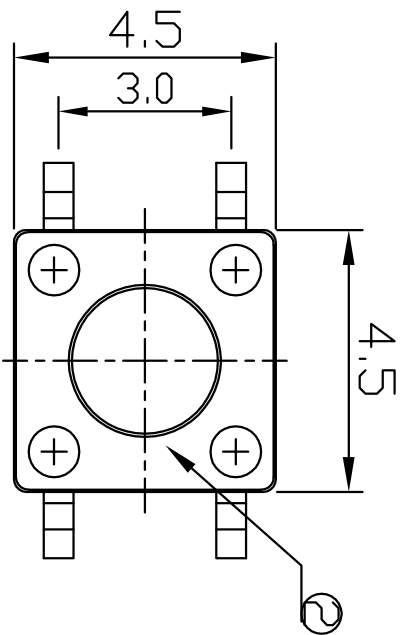


REV	DESCRIPTION	APPD	DATE

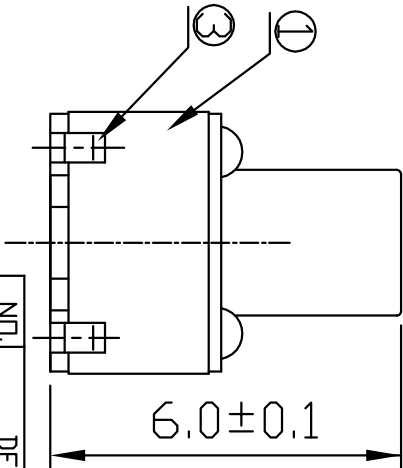


P.C.B Holes diagram

MAX.Ø2.3

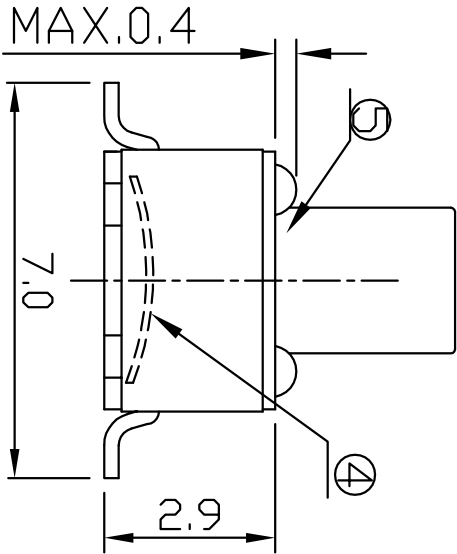

Circuit diagram



- 1.额定功率/Ra ting:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:50mΩMax;
- 3.绝缘/Insulation Resistance:100MΩMin;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute
- 5.寿命/Life:100,000 cycles Min;
- 6.动作力/Operating Force:250±50gf
- 7.行程/Travel:0.2±0.1mm

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	BASE	1	PA66	BLACK
2	COVER	1	SPCC	PLATING Sn
3	TERMINAL	4	C2680	PLATING Sn
4	CONTACT	1	SUS	PLATING Ag
5	STEM	1	PA66	BLACK

UNIT:MM	SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
SCALE: 1/1	VER: 1	MODEL NO: TS44A-S60-M	

PART NO:	DWG NO:	DESIGNER BY: YONGX	APPROVED BY: JACK
GENERAL TOLERANCE: X=±0.5, .XX=±0.05	DATE:		