

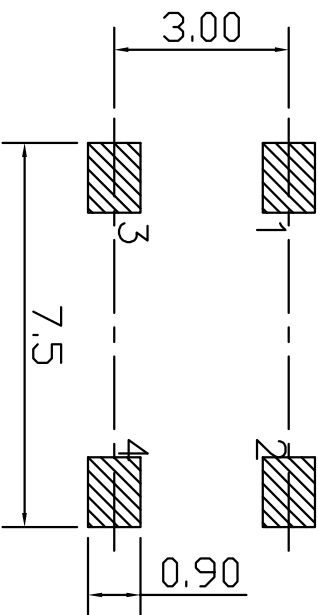
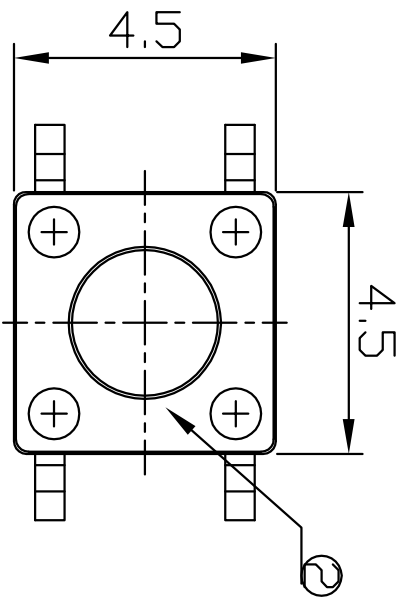



REV	DESCRIPTION	APPD	DATE



P.C.B Holes diagram

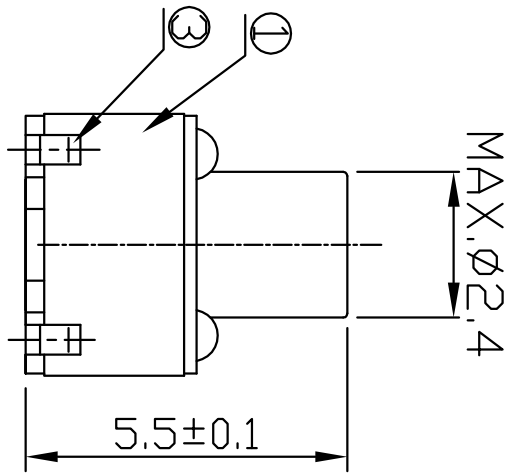

Circuit diagram

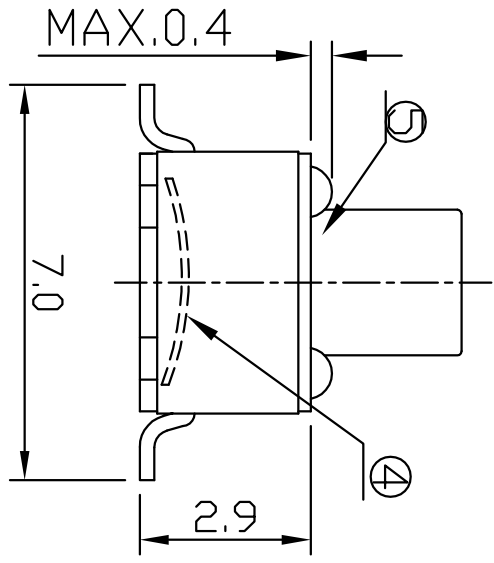

1. 额定功率/Ra ting:DC 12V 50mA;
2. 接触阻抗/Contact Resistance:100mΩMax;
3. 绝缘/Insulation Resistance:100MΩMin;
4. 耐电压/Withstanding Voltage:AC250V For 1 Minute
5. 寿命/Life:100,000 cycles Min;
6. 动作力/Operating Force:250±50gf
7. 行程/Travel:0.2±0.1mm

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	BASE	1	PA66	BLACK
2	COVER	1	SPCC	PLATING Sn
3	TERMINAL	4	C2680	PLATING Sn
4	CONTACT	1	SUS	PLATING Ag
5	STEM	1	PA66	BLACK
UNIT:mm				
TITLE: TACT SWITCH				
MODEL NO: TS44A-S55-M				
PART NO: DVG NO: DESIGNER BY: DONGY				
X=±0.5, .X=±0.25 APPROVED BY: JACK				
.XX=±0.15, .XXX=±0.05 DATE:				
.X*=±2° .XX*=±1°				