
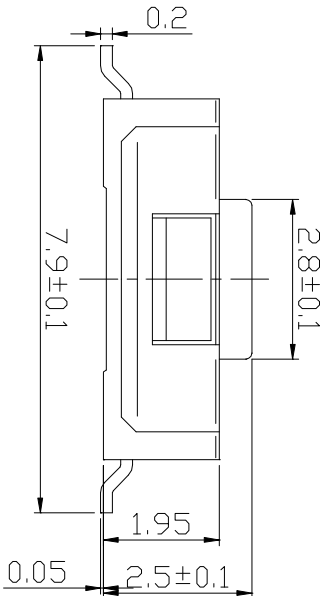

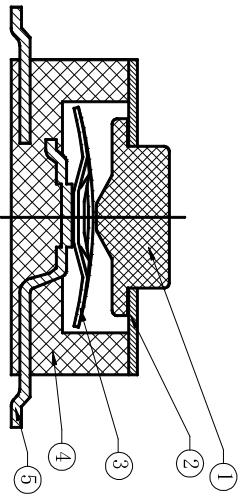
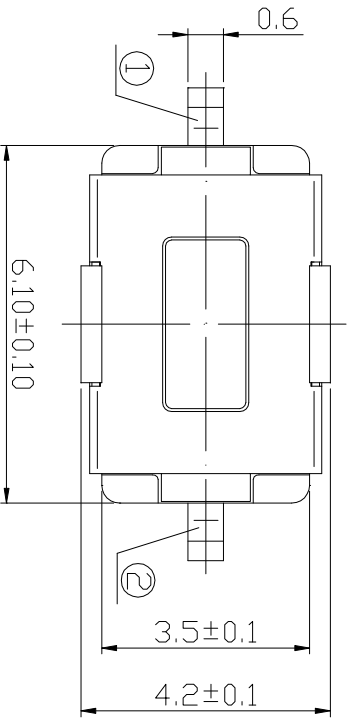
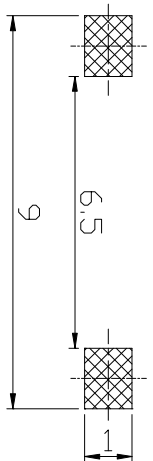


REV	DESCRIPTION	APPD	DATE
-----	-------------	------	------



PCB LAYOUT(TOP VIEW)

Circuit Diagram

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	STEM	1	PPA	RED
2	COVER	1	CS210	PLATING Sn
3	CONTACT	1	Ag-SUS303	PLATING Ag
4	BOTTOM	1	PA6T	BLACK
5	TERMINAL	2	C2680	PLATING Ag
UNIT:MM		TITLE: TACT SWITCH		
PART NO:		MODEL NO: TS46A-S25-M		
GENERAL TOLERANCE:		DATE: 2024-01-15		
X=±0.5, .X=±0.35		DESIGNER BY: JERRY		
.XX=±0.15, .XXX=±0.05		APPROVED BY: PAUL		
.X*=±2°, .XX*=±1°		GONGKIN ELECTRONIC CO.,LTD		

- 1.额定功率/Ra ting:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:50m ΩMax;
- 3.绝缘/Insulation Resistance:100M ΩMax;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute
- 5.寿命/Life: 50,000 M30, 000 cycles Min;
- 6.动作力/Operating Force: 160±50gf M 250±50gf
- 7.行程/Travel:0.2±0.1mm