
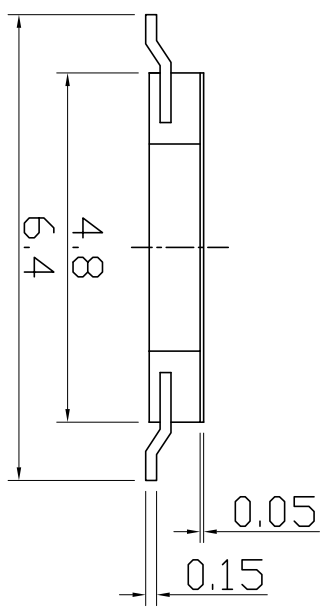
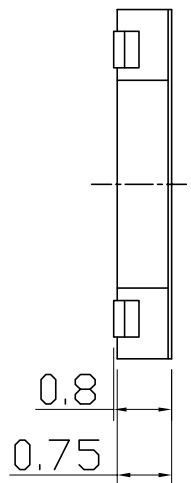
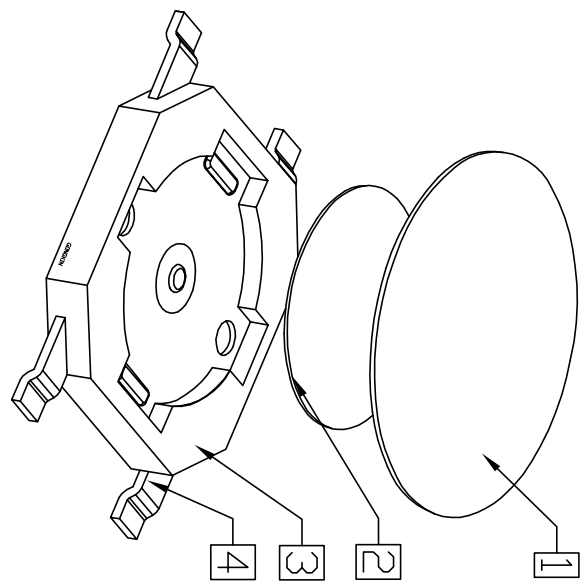
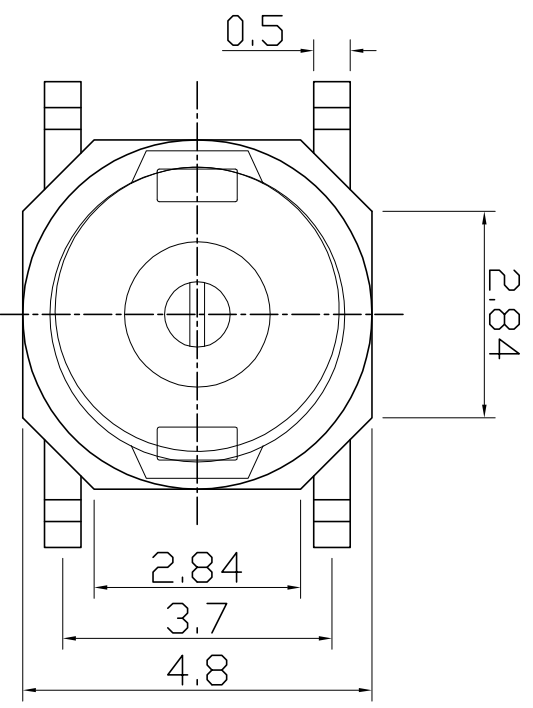
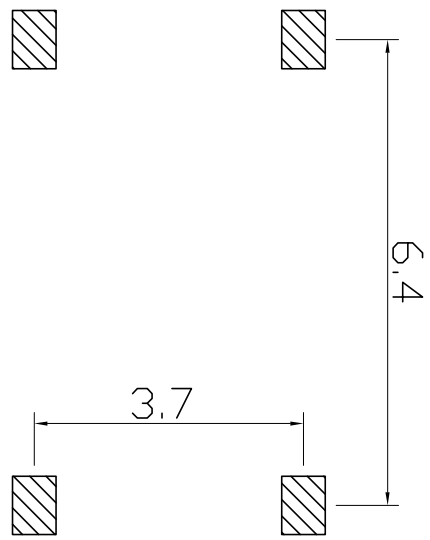


REV	DESCRIPTION	APPD	DATE



PCB LAYOUT(TOP VIEW)

SCHEMATIC

- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩMax;
- 3.绝缘/Insulation Resistance:100MΩMax;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
- 5.寿命/Life:100,000 cycles Min;
- 6.动作力/Operating Force:250±50gf;
- 7.行程/Travel:0.25±0.1mm;
- 8.使用温度/Operating Temperature:-20℃~80℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	MEMBRANCE	1	P10.05	YELLOW
2	CONTACT	1	SUS301	PLATING Ag
3	BOTTOM	1	LCP OR PA	BLACK
4	TERMINAL	4	CS191	PLATING Sn
UNIT:MM	SIZE: A4		SHEET: 1 OF 1	
	SCALE: 1/	VER: 1	TITLE: TACT SWITCH	
PART NO:	DWG NO:		MODEL NO:	TSS5F-S08-M
GENERAL TOLERANCE:			<div> 岡崎電子有限公司</div> <div>GONGKIN ELECTRONIC CO.,LTD</div>	
X=±0.25, .X=±0.2				
.XX=±0.1, .XXX=±0.05				
.X*=±2°, .XX*=±1°				
		DESIGNER BY:	LEAF	
		APPROVED BY:	JACK	
		DATE:		