
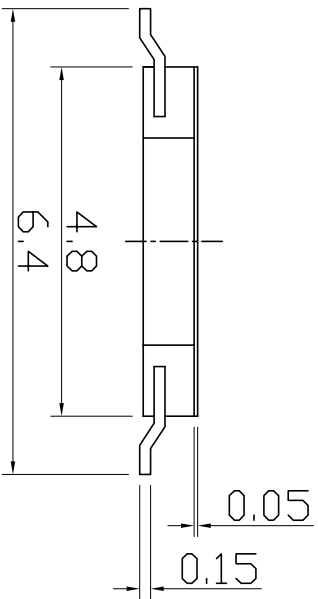
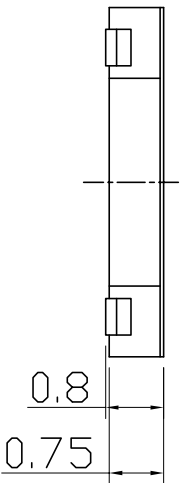
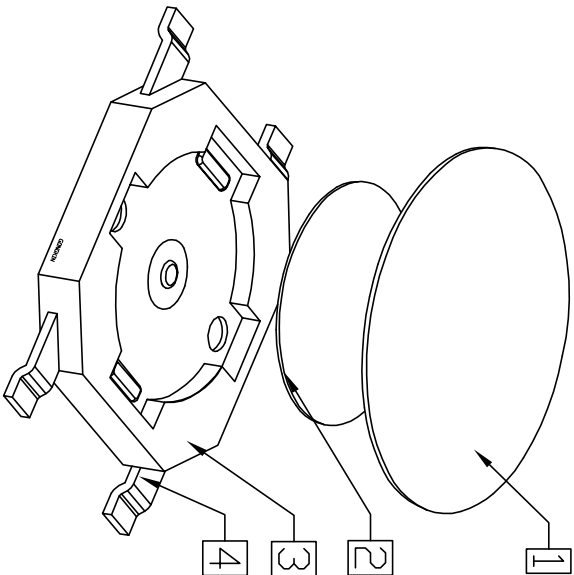
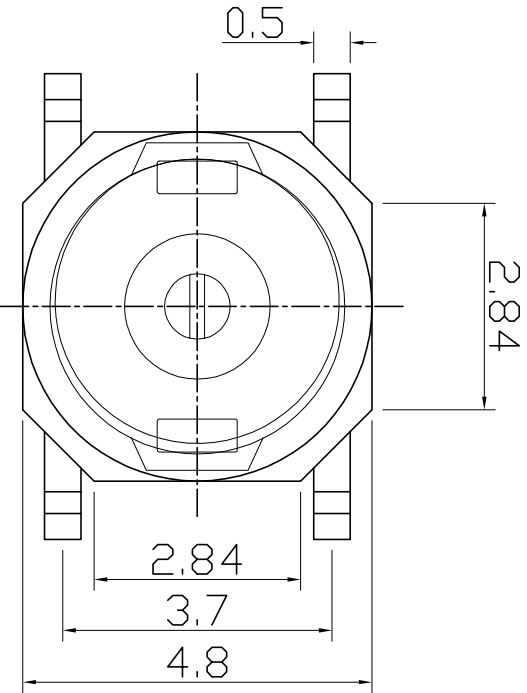



REV	DESCRIPTION	APPD	DATE



PCB LAYOUT(TOP VIEW)

SCHEMATIC

- 1.额定功率/Rating:DC 12V 50mA;
- 2.接触阻抗/Contact Resistance:100mΩMax;
- 3.绝缘/Insulation Resistance:100MΩMax;
- 4.耐电压/Withstanding Voltage:AC250V For 1 Minute;
- 5.寿命/Life:100,000 cycles Min;
- 6.动作力/Operating Force:180±40gf;
- 7.行程/Travel:0.25±0.1mm;
- 8.使用温度/Operating Temperature:-20℃~80℃.

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
1	MEMBRANCE	1	P1005	YELLOW
2	CONTACT	1	SUS301	PLATING Ag
3	BOTTOM	1	LCP OR PA	BLACK
4	TERMINAL	4	CS191	PLATING Sn
UNIT:MM		TITLE: TACT SWITCH		
SCALE: 1/1		MODEL NO: TSS5F-S08-J		
GENERAL TOLERANCE: 1		DESIGNER BY: YONGX		
X=±0.25, X=±0.2		APPROVED BY: JACK		
.XX=±0.1, .XXX=±0.05		DATE:		
.X*=±2°, .XX*=±1°		GONGKIN ELECTRONIC CO.,LTD		

1	2	3	4	5	6	7	8
A	B	C	D	E	F	G	H
1	2	3	4	5	6	7	8