
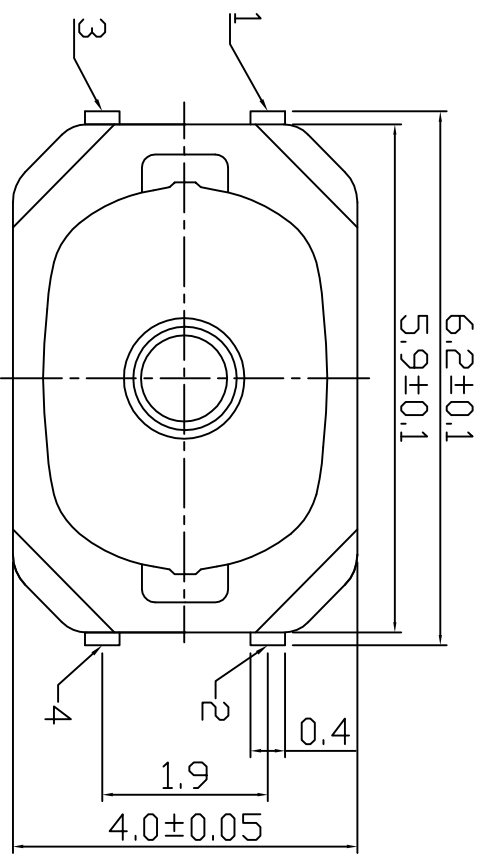
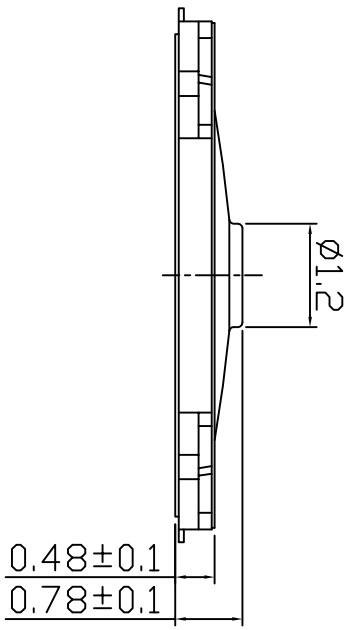


CIRCUIT DIAGRAM

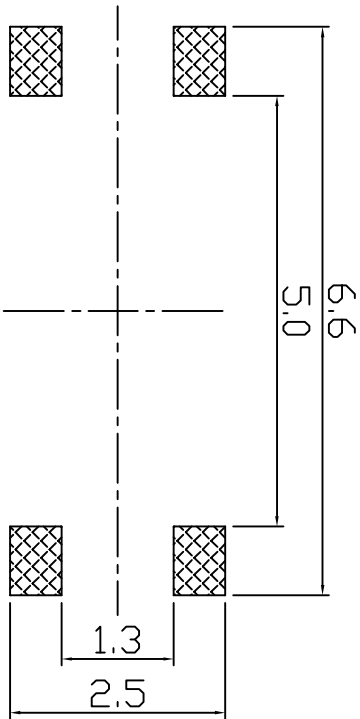

P.C.B. LAYOUT

NO.	DESCRIPTION	QTY	MATERIAL	FINISH
A	STEM	1	PA	BLACK
B	WATERPROOF FILM	1	PA	WHITET
C	CONTACT	2	SUS301-EH Ag	SILVER
D	BASE	1	PA	BLACK
E	TERMINAL	4	CS210	SILVER

UNIT:mm	SIZE: A4	SHEET: 1 OF 1	TITLE: TACT SWITCH
SCALE: 1	VER: 1	MODEL NO: TS46E-F78-M	
PART NO: DVG NO:			
GENERAL TOLERANCE: X=±0.25, Y=±0.2, Z=±0.1, XX=±0.05, YY=±0.1		DESIGNER BY: YONGX	
DATE:		APPROVED BY: JACK	
GONGKIN ELECTRONIC CO.,LTD			

- 额定功率/Rating:DC 12V 50mA;
- 接触阻抗/Contact Resistance:100mΩ Max;
- 绝缘/Insulation Resistance:50MΩ Max;
- 耐电压/Withstanding Voltage:AC100V For 1 Minute;
- 寿命/Life:100,000 cycles Min;
- 动作力/Operating Force:250±40gf;
- 行程/Travel:0.2±0.05mm;
- 使用温度/Operating Temperature:-30℃~80℃.